












# I.D.C. SOCKET 2.54mm (0.100")

**Specifications:**  
Contact Resistance: 30mΩmax.at DC 100mA  
Insulator Resistance: 1000MΩmin.at DC 500V  
Current Rating: 1 AMP

**Dielectric Withstanding**  
Voltage: AC 500V For 1 minute  
Operating Temperature: -55°C ~ +105°C  
Contact: Phosphor Bronze  
Housing: PBT & 30% Glass Fiber (UL 94V-O)

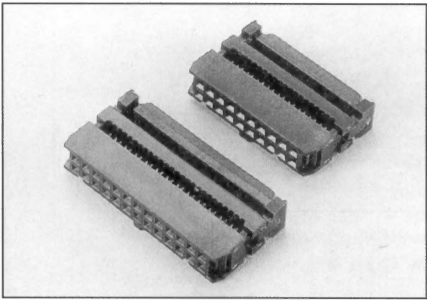

**Dimension**

Position	Dimension	
	A	B
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
24	35.05	27.94
26	37.59	30.48
30	42.67	25.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74